


AUTOMATIC WEATHER SEAL

LSR8302

A cam activated automatic weather seal, with high efficiency spring mechanism that lifts the seal clear of the floor as soon as you open the door by a few millimetres. No cutting or removal of the door is required; simply screw in place.

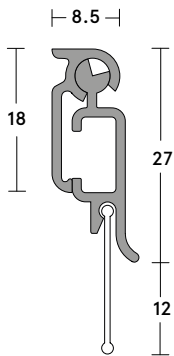

LSR8302



LSR8302

AUTOMATIC WEATHER SEALS

SYSTEM SPECIFICATIONS

Key benefits

- ▶ Suitable for many door types.
- ▶ Ideal for security screens.
- ▶ Quick & easy installation - no need to cut or remove the door.
- ▶ Flexible and durable.

Performance

- ▶ Protects against weather, cold, draught, light, sound, insects and vermin.

Approvals

- ▶ Bushfire: Approved for use on fire door assemblies for Bushfire attack levels of BAL<29.

Location

- ▶ Opening side of the door.
- ▶ Closing side of the door.
- ▶ Overlay doors.

Gap sizes

- ▶ 3mm - 16mm.

Length

- ▶ 925mm - can be cut back to 400mm.

Seal material

- ▶ Aluminium carrier with a flexible PVC blade.

Fixing method

- ▶ LSR8302 is screw fixed onto the bottom of the door.
- ▶ Use the lever and stike plate for the opening side of a door.
- ▶ Use the lever and triangualr stike for overlay doors.
- ▶ Use the circular stike for the closing side of the door.

Finishes

- ▶ Silver anodised aluminium with grey fixings.
- ▶ White lacquered aluminium with grey fixings.
- ▶ Brown lacquered aluminium with black fixings.