


## AUTOMATIC WEATHER SEAL

# LSR8303

A cam activated automatic weather seal, with high efficiency spring mechanism that lifts the seal clear of the floor as soon as you open the door by a few millimetres. A clever clip system enables quick and easy installation.



AUTOMATIC WEATHER SEALS

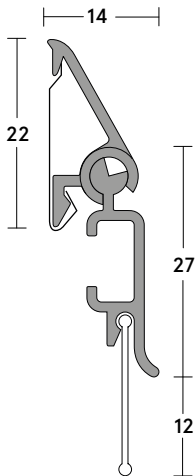

LSR8303



LSR8303

### SYSTEM SPECIFICATIONS

#### Key benefits

- ▶ Suitable for many door types.
- ▶ Ideal for security screens.
- ▶ Quick & easy installation - no need to cut or remove the door.
- ▶ Flexible and durable.

#### Performance

- ▶ Protects against weather, cold, draught, light, sound, insects and vermin.

#### Approvals

- ▶ Bushfire: Approved for use on fire door assemblies for Bushfire attack levels of BAL<29.

#### Location

- ▶ Opening side of the door.
- ▶ Closing side of the door.
- ▶ Overlay doors.

#### Gap sizes

- ▶ 3mm - 28mm.

#### Length

- ▶ 925mm - can be cut back to 150mm.

#### Seal material

- ▶ Aluminium carrier with a flexible PVC blade.

#### Fixing method

- ▶ LSR8303 is screw fixed onto the bottom of the door with hidden spring clips.
- ▶ Use the lever and stike plate for the opening side of a door.
- ▶ Use the lever and triangular stike for overlay doors.
- ▶ Use the circular stike for the closing side of the door.

#### Finishes

- ▶ Silver anodised aluminium with grey fixings.
- ▶ White lacquered aluminium with grey fixings.
- ▶ Brown lacquered aluminium with black fixings.