

AAS 7501


PERIMETER SEAL

A stylish perimeter seal with square cover plate ideal for butt-jointing or mitring. Proven performance for acoustic containment. The decorative cover plate completely conceals fixings.

MEDIUM DUTY



TECHNICAL



AAS7501 ↑

Location

Head and jambs of single swing doors.

Seal Material

Silicone rubber.

Fixing

- Fixing holes pre-drilled and slotted for positional accuracy.
- Screw pack supplied.


Finishes

- Silver anodised aluminium with grey silicone gasket.

Standard Lengths

- 1m, 2.1m and 2.75m.
- Doorset packs:
 - Single doorset (SDS): (1 x 1m, 2 x 2.1m).
 - Long single doorset (LSDS): (1 x 1m, 2 x 2.7m).
 - Double doorset (DDS): (3 x 2.1m).
 - Long double doorset (LDDS): (1 x 2.1m, 2 x 2.75m).
- Other lengths available for special order.

AAS7501 ↓

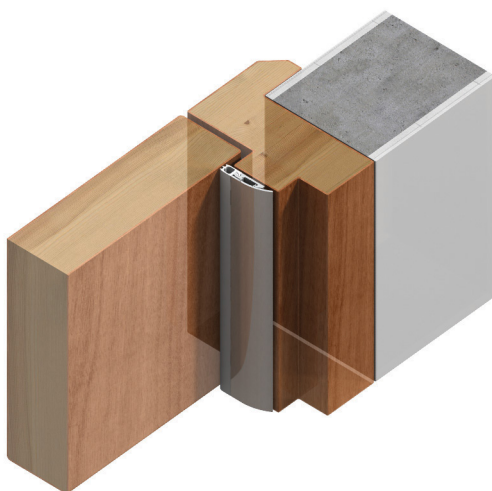

PERFORMANCE

Fire

Approved for use on proprietary AS1905.1 fire doors for up to 4 hour fire rating.

Acoustic

ISO 10140-2 & AS/NZS ISO717.1.

Bushfire

Approved for use on proprietary fire door assemblies for Bushfire attack levels of Flame Zone (FZ) classification or less.

Weighted Sound Reduction Index

39 dB.
(AAS7501 & AAS8501 on a proprietary acoustic door).

Durability

100,000 cycles on full-size door assemblies.