

# AAS 7503


## PERIMETER SEAL

A stylish perimeter seal with square cover plate ideal for butt-jointing or mitring. Proven performance for acoustic containment. The decorative cover plate completely conceals fixings.

### MEDIUM DUTY



## TECHNICAL



AAS7503 ↑

### Location

Head and jambs of single swing doors.

### Seal Material

Silicone rubber

### Fixing

- Fixing holes pre-drilled and slotted for positional accuracy.
- Screw pack supplied.


### Finishes

- Silver anodised aluminium with grey silicone gasket.
- Decorative finishes available.

### Standard Lengths

- 1m, 2.1m and 2.75m.
- Doorset packs:
  - Single doorset (SDS): (1 x 1m, 2 x 2.1m).
  - Long Single doorset (LSDS): (1 x 1m, 2 x 2.7m).
  - Double doorset (DDS): (3 x 2.1m).
  - Long double doorset (LDDS): (1 x 2.1m, 2 x 2.75m).
- Other lengths available for special order.

AAS7503 ↓

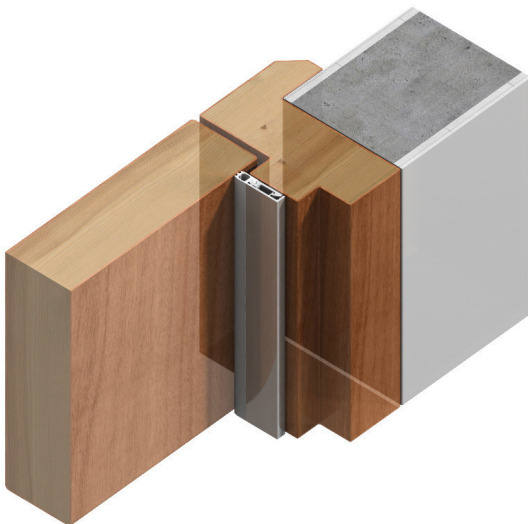

## PERFORMANCE

### Fire

Approved for use on proprietary AS1905.1 fire doors for up to 4 hour fire rating.

### Acoustic

ISO 10140-2 & AS/NZS ISO717.1.

### Bushfire

Approved for use on proprietary fire door assemblies for Bushfire attack levels of Flame Zone (FZ) classification or less.

### Weighted Sound Reduction Index

39 dB  
(AAS7501 & AAS8501 on a proprietary acoustic door).

### Durability

100,000 cycles on full-size door assemblies.