

PERIMETER SEALS


LAS7004 si

MEDIUM DUTY


Slimline, medium duty perimeter seal designed for or use around the perimeter and meeting stiles of single or double swing doors.



PERIMETER SEALS



LAS7004 si

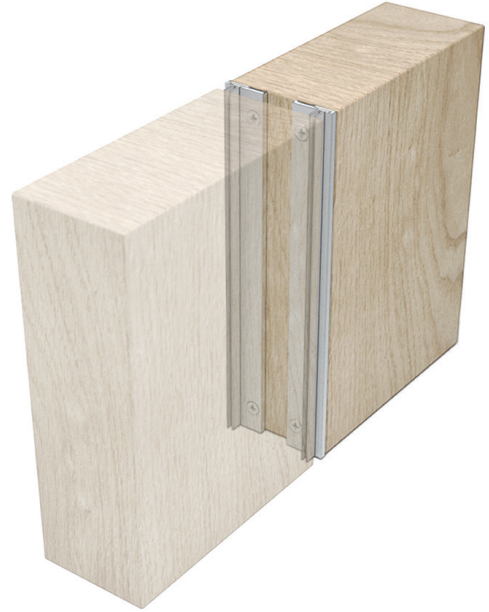

LAS7004 si shown fitted to meeting stiles

SYSTEM SPECIFICATIONS

Key benefits

- ▶ Effective sealing solution for smoke, sound, light or weather.
- ▶ Acoustic data available in accordance with ISO10140.2.
- ▶ Durable silicone rubber finned gasket.
- ▶ Suitable to meet DTS smoke door specification C3.4.
- ▶ The leg of this seal can be cut out to accommodate lock hardware.
- ▶ May be surface mounted or semi mortised.

Location

- ▶ Meeting stiles of single and double swing doors.
- ▶ Sliding doors.

Approvals

- ▶ **Sound:** Acoustically tested in accordance with ISO10140-2 and AS/NZS717.1 with ratings up to 38Rw on appropriate rated assemblies.
- ▶ **Durability:** Tested for reliability, the seal completed 100,000 cycles without failure.

Seal material

- ▶ Silicone rubber.
- ▶ Note: twin elastomeric fins will provide optimum acoustic performance.

Fixing method

- ▶ Screw fixed to the door frame with supplied screw pack.

Standard lengths

- ▶ 1m, 2.1m, 2.75m and 3m.
- ▶ Other lengths to special order.

Finishes

- ▶ Silver anodised aluminium with grey twin fin silicone rubber insert.