


LAS9050 si & LAS9070 si


MEDIUM DUTY

Trapping fingers in hinged doors can cause horrendous injuries. The risk is especially high in locations where young children are present. The finger guard seals provide a deterrent barrier that shields both sides of the hinged door jamb.

FINGER GUARD SEALS

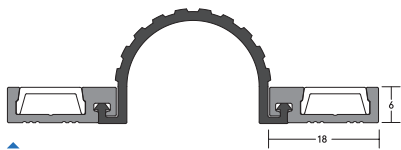

LAS9050 si

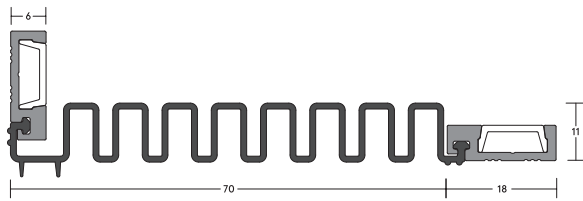

LAS9070 si



LAS9050 si

LAS9070 si

SYSTEM SPECIFICATIONS

Key benefits

- ▶ Protection may be provided by using the LAS9050 on the hinge knuckle side and the LAS9070 to the reveal side.
- ▶ LAS9070 includes unique, integral acoustic sealing fins and may be used in conjunction with the LAS7001 si and LAS8001 si to create a comprehensive acoustic sealing and finger protection system.

Approvals

- ▶ Durability: Tested over 200,000 full opening and closing cycles without any sign of degradation.

Standard lengths

- ▶ 2.1m and 2.75m.
- ▶ Other lengths to special order.

Fixing method

- ▶ Fixing screws are supplied. Fixing holes are pre-drilled and slotted to allow the seals to be adjusted and positioned accurately. A PVC cover strip to conceal fixings is supplied.

Please note

- ▶ We do not recommend using the LAS9070 si on an aluminium frame.
- ▶ Please note: when LAS9050 si and LAS9070 si are used together, the door can only open up to 170 degrees.

Finishes

- ▶ Silver anodised aluminium with grey cover strip and black gasket.